



Introduction

XLR dynamic microphone

M10D is a high quality handheld dynamic microphone, great for live use, as dynamic microphones can be more rugged and able to withstand life on the road.


Key Features

- ▶ Durable metal body
- ▶ Cardioid pickup to reduce unwanted noise
- ▶ Uni-directional cardioid pattern diaphragm
- ▶ Balanced XLR connector

Specifications

MODEL NAME	M10D
Element	Dynamic
Polar pattern	Cardioid uni-directional
Frequency Response	50Hz - 16kHz
Sensitivity	-56dB±3dB (0dB=1V/pa at 1kHz)
Output impedance	19Ω±20% at 1kHz
Body dimensions	51mmØ x 165mm



Frequency response diagram

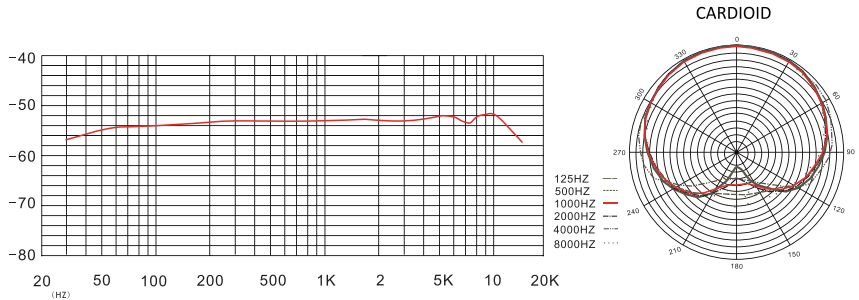

To connect an XLR cable

1 To hold the M10D in one hand and your 3-pin XLR cable in the other, align the slot on the XLR cable to the groove on the inside of M10D body and insert. Ensure that the XLR cable 'clicks' into place so that it can not be removed unless the release latch is used.

2 Please ensure the XLR cable you are using is wired correctly to match the output pins on the M10D. You may of course use XLR-XLR, XLR-jack, or XLR-mini jack plugs depending on your relevant input socket.

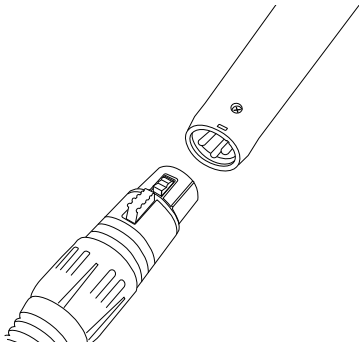

What's in the box

- 1 x AUDIQ M10D XLR dynamic microphone
- 1 x CONNEQ CL2 microphone clip
- 1 x CONNEQ WS1 windshield
- 1 x CONNEQ CA1 soft carry pouch
- 1 x User Guide